

Clip on Guard

Safety / Security Guard




Model CLPOG

KEY FEATURES

Designed for new and retrofit applications, for both metal and wood curbs.
Curb top design provides lifetime OSHA compliant fall protection with or without a dome.
OSHA Compliant Fall Protection Device.

PRODUCT PROFILE

Details Not To Scale

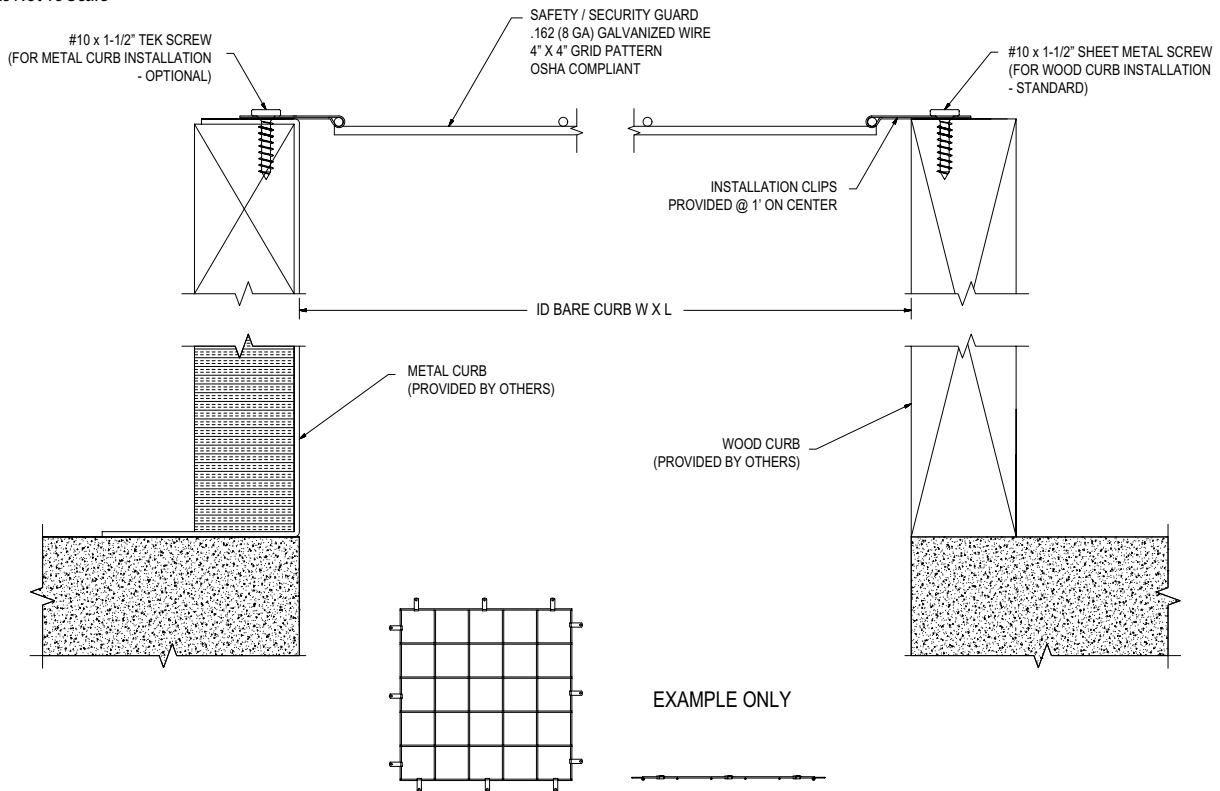

SPECIFICATIONS

Safety / Security Guard shall be Sunoptics model **CLPOG** as manufactured by AES Sunoptics, Inc., 2171 Alabama Hwy 229, Tallassee, AL 36078 | 916/395-4700.

CLPOG (Clip on Guard) shall be fabricated from 8 gauge (.162" diameter) galvanized cold roll steel, 4" maximum on center in both directions, having a 75,000 PSI tensile strength. **(Meets OSHA Fall Protection Requirements)**

CLPOG (Clip on Guard) are provided with the necessary installation clips.

OTHER GUARD STYLES (see Ordering Logic):

- "Z" Frame Guards shall be fabricated from 8 gauge (.162" diameter) galvanized cold roll steel, 4" maximum on center in both directions, having a 75,000 PSI tensile strength.

All Safety / Security Guards shall be ready for installation and shall include #10 x 1-1/2" SMS, sheet metal screws. TEK screws are available for Metal Curb installations.

Note: Specifications subject to change without notice.

ORDERING LOGIC

Clip on Guard

Fixture		ID Bare Curb Callout			ID Bare Curb Width			ID Bare Curb Length			Guard Type	
GUARD	Safety/	4040	47" x 47"	/ 1194mm x 1194mm	W47	47"	(1194 mm)	L47	47"	(1194 mm)	CLPOG	Clip on Guard
	Security	4060	47" x 71"	/ 1194mm x 1803mm	W47	47"	(1194 mm)	L71	71"	(1803 mm)	ZFRM	"Z" Frame Guard
	Guard	4070	47" x 83"	/ 1194mm x 2108mm	W47	47"	(1194 mm)	L83	83"	(2108 mm)		
		4080	48" x 96"	/ 1219mm x 2438mm	W48	48"	(1219 mm)	L96	96"	(2438 mm)		
		5060	59-3/8" x 71-3/8"	/ 1508mm x 1813mm	W59.375	59-3/8"	(1508 mm)	L71.375	71-3/8"	(1813 mm)		



GUARD_CLIP ON GUARD