

# Clip on Guard

Safety / Security Guard




## Model CLPOG

### KEY FEATURES

Designed for new and retrofit applications, for both metal and wood curbs.  
 Curb top design provides lifetime OSHA compliant fall protection with or without a dome.  
 OSHA Compliant Fall Protection Device.

### PRODUCT PROFILE

Details Not To Scale

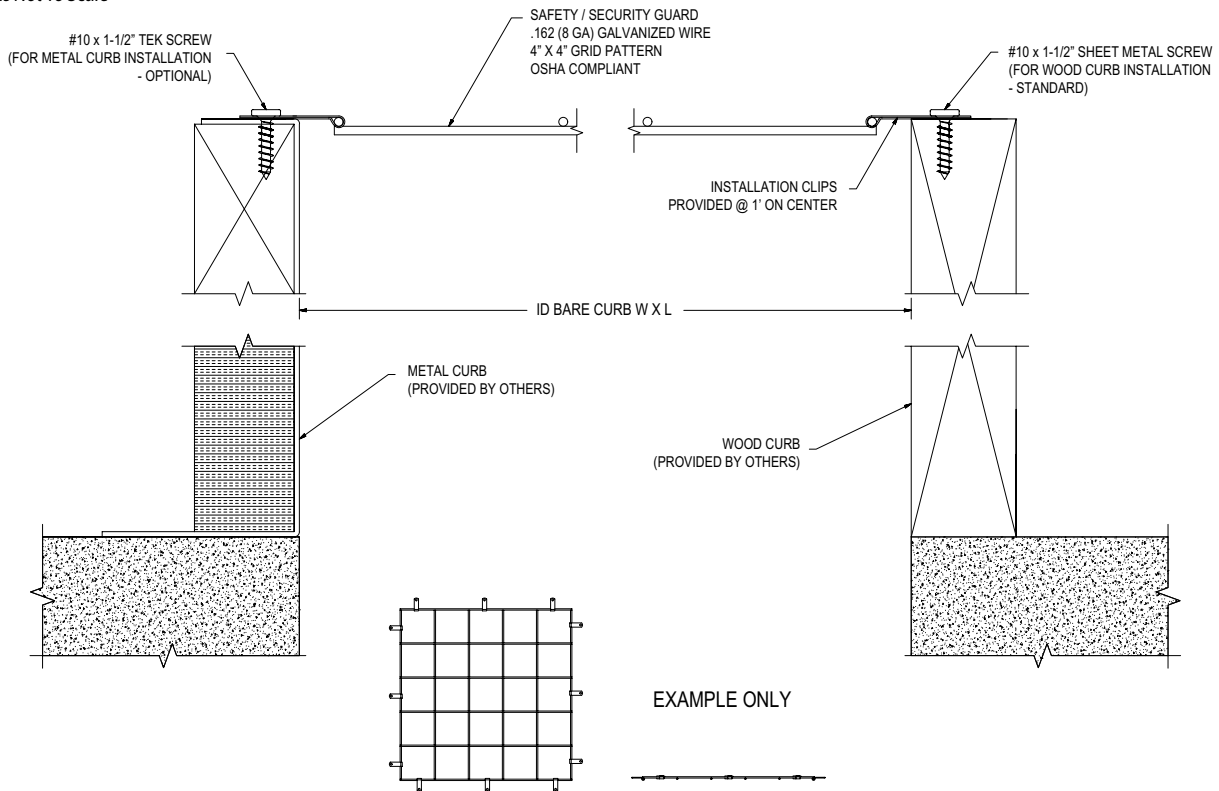

### SPECIFICATIONS

Safety / Security Guard shall be Sunoptics model **CLPOG** as manufactured by AES Sunoptics, Inc., 2171 Alabama Hwy 229, Tallassee, AL 36078 | 916/395-4700.

**CLPOG (Clip on Guard)** shall be fabricated from 8 gauge (.162" diameter) galvanized cold roll steel, 4" maximum on center in both directions, having a 75,000 PSI tensile strength. **(Meets OSHA Fall Protection Requirements)**

**CLPOG (Clip on Guard)** are provided with the necessary installation clips.

**OTHER GUARD STYLES** (see Ordering Logic):

- "Z" Frame Guards shall be fabricated from 8 gauge (.162" diameter) galvanized cold roll steel, 4" maximum on center in both directions, having a 75,000 PSI tensile strength.

All Safety / Security Guards shall be ready for installation and shall include #10 x 1-1/2" SMS, sheet metal screws. TEK screws are available for Metal Curb installations.

**Note:** Specifications subject to change without notice.

# ORDERING LOGIC

# Clip on Guard

Fixture		ID Bare Curb Callout			ID Bare Curb Width			ID Bare Curb Length			Guard Type	
<b>GUARD</b>	Safety/	<b>4040</b>	47" x 47"	/ 1194mm x 1194mm	<b>W47</b>	47"	(1194 mm)	<b>L47</b>	47"	(1194 mm)	<b>CLPOG</b>	Clip on Guard
	Security	<b>4080</b>	48" x 96"	/ 1219mm x 2438mm	<b>W48</b>	48"	(1219 mm)	<b>L96</b>	96"	(2438 mm)	<b>ZFRM</b>	"Z" Frame Guard
	Guard	<b>5060</b>	59-3/8" x 71-3/8"	/ 1508mm x 1813mm	<b>W59.375</b>	59-3/8"	(1508 mm)	<b>L71.375</b>	71-3/8"	(1813 mm)		



GUARD\_CLIP ON GUARD